


Load Rating: 60 Tonne  
 Proof Load: 90 Tonne  
 Safety Factor: 3:1  
 Cable: Wetcon OM-4-FS Connector  
 + 50M PUR Moulded 4 Core  
 Expected Output: 1.8 mV/V

Submersion Depth 10 Metres

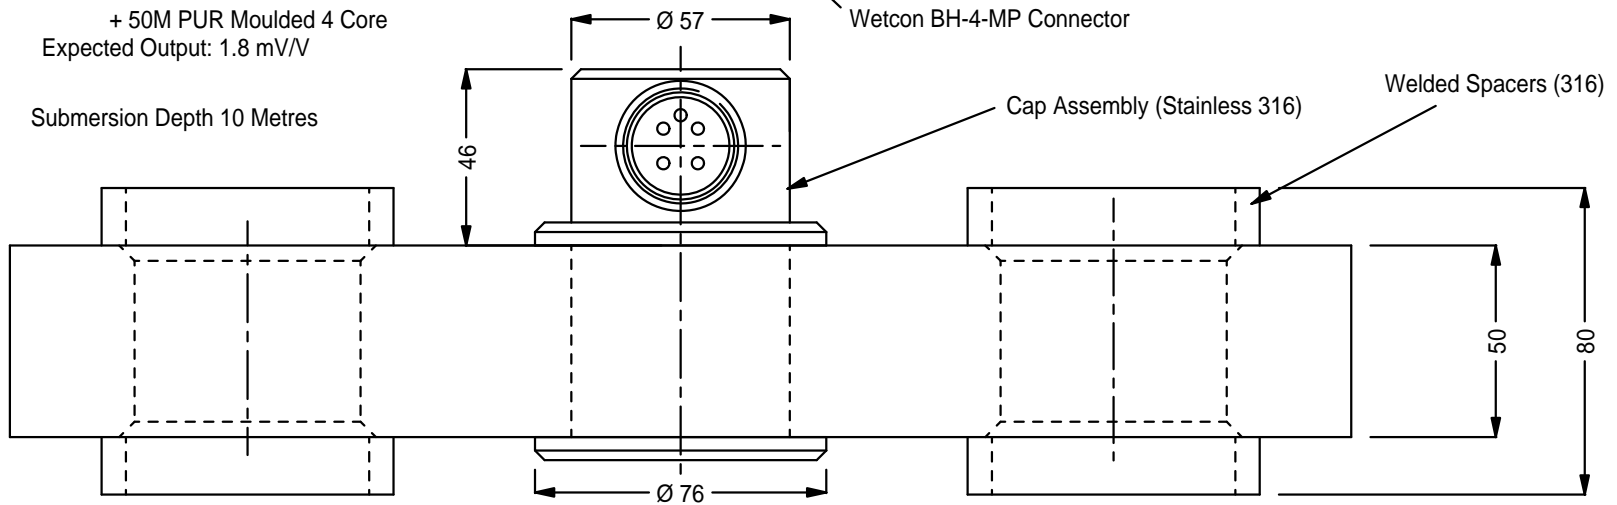

<small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE PROPERTY OF LCM SYSTEMS. IT MAY NOT BE REPRODUCED IN ANY FORM, NOR THE CONTENT DISCLOSED TO ANY THIRD PARTY WITHOUT THE WRITTEN CONSENT OF THE COMPANY</small>		<b>TITLE:</b> Link Load Cell		<b>ISSUE:</b> A	<b>DATE:</b> 09/06/06
	<small>DO NOT SCALE IF IN DOUBT ASK</small>		<b>MATERIAL:</b> 17-4PH		
	<small>DIMENSIONS IN MILLIMETRES</small>		<b>FINISH:</b>		
	<small>PROJECTION</small>		<b>SCALE:</b> Do Not Scale		
	<small>REMOVE SHARP EDGES</small>		<b>DRG NO:</b> LCM 2965		
<small>LCM Systems Ltd        Unit 15 Newport Business Park        Barry Way        Newport        Isle of Wight PO30 5GY        Tel: 01983 249264        Fax: 01983 249266</small>		<small>TOLERANCES - UNLESS STATED</small>		<small>FABRICATIONS/CASTINGS</small>	
		<small>UP TO 10mm +/- 0.1</small>	<small>UP TO 600mm +/- 1.0</small>		
		<small>FROM 10mm TO 100mm +/- 0.25</small>	<small>OVER 600mm +/- 2.0</small>		
		<small>OVER 100mm +/- 0.5</small>			
		<small>ANGULAR DIMS +/- 1°</small>			