


T24-HS-LS Telemetry Handheld Simple Display



Dimensions

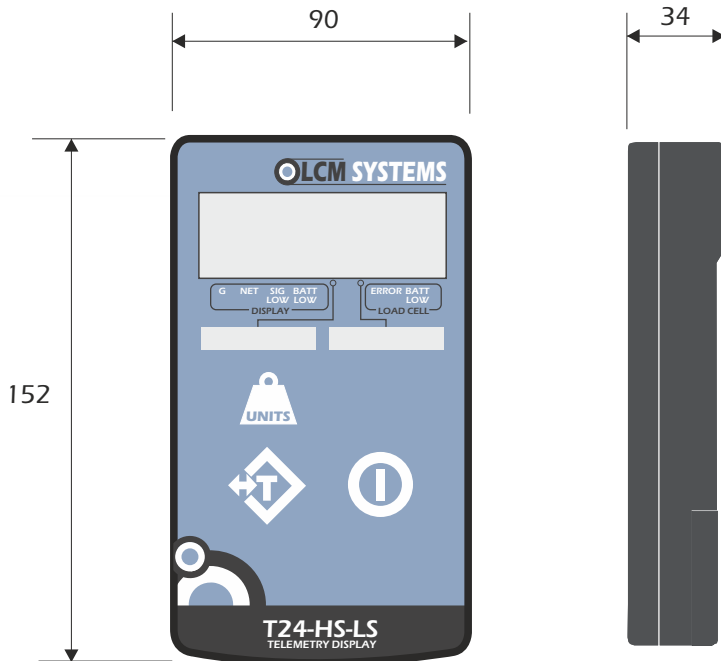

All dimensions are in mm

Module transmits and receives using:

1. Full error detection and correction
2. Remote and local battery check

Note: Use a pair of alkaline AA batteries. Due to the higher voltage requirements of this device, NiMh or NiCad batteries are not recommended.

www.lcmsystems.com

Due to continual product development, LCM Systems Ltd reserves the right to alter product specifications without prior notice.