



Load Rating: 250 Tonne  
 Proof Load: 375 Tonne  
 Break Load: 860 Tonne  
 Expected Output: 3.0 mV/V ±2% (Rationalised)  
 Cable: 4 Core PUR (10 Metres)

Material: Green Pin P-6033 250 Tonne Shackle  
 + Stainless Steel Brackets

Lumberg RSF4/0.5M Fixcon / M12 Chassis Connector  
 Lumberg RKCS 4/9 Cable Connector

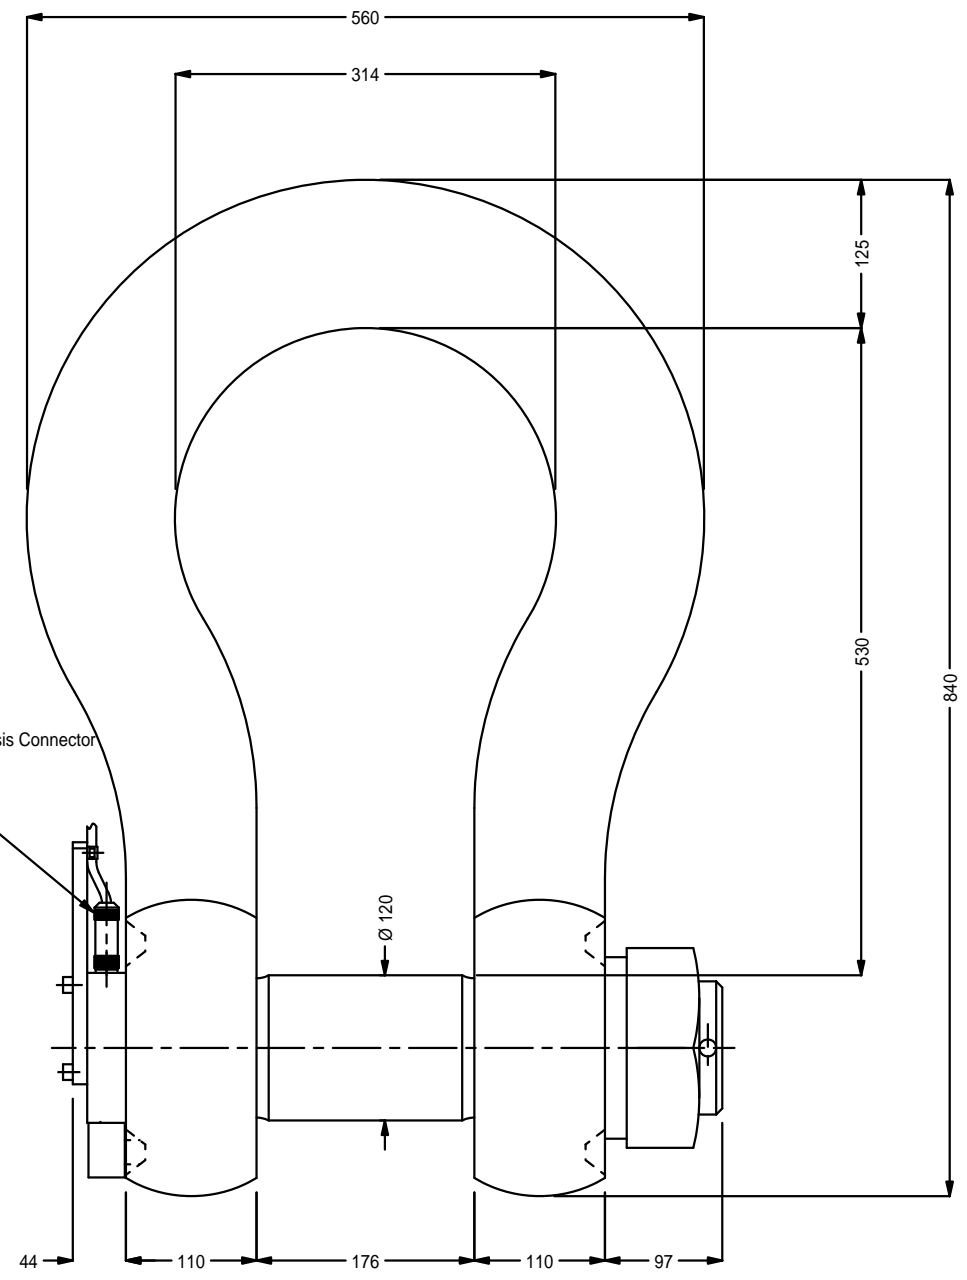

DO NOT SCALE  
 IF IN DOUBT ASK



DIMENSIONS IN  
 MILLIMETERS

TOLERANCES UNLESS STATED			
GENERAL SURFACE	3.2		
UP TO 10mm	+/-0.1	FABRICATIONS/CASTINGS	
FROM 10mm to 100mm	+/-0.25	UP TO 600mm	+/-1.0
OVER 100mm	+/-0.5	OVER 600mm	+/-2.0
ANGULAR DIMS	+/-1°	REMOVE SHARP EDGES	

TITLE: <b>Load Shackle</b>		
ISSUE: A	DRAWN BY: AB	DATE: 19/08/08
MATERIAL: See Notes		FINISH: N/A
CHANGE: INITIAL ISSUE		



LCM Systems Ltd  
 Unit 15 Newport Business Park  
 Barry Way  
 Newport  
 Isle of Wight  
 PO30 5GY  
 Tel: 01983 249264 Fax: 01983 249266

DRG NO: **LCM 3503**