


T24-HS-LS Telemetry Handheld Simple Display

Dimensions

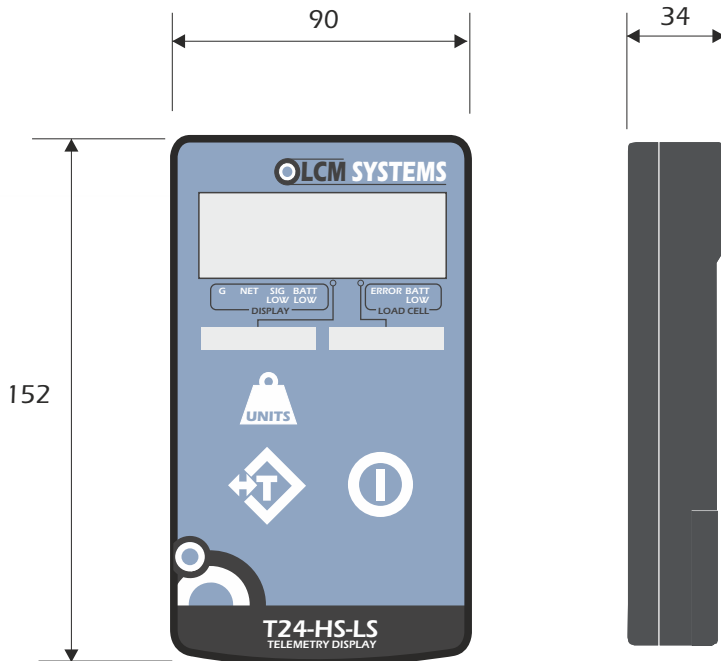

All dimensions are in mm

Module transmits and receives using:

1. Full error detection and correction
2. Remote and local battery check

Note: Use a pair of alkaline AA batteries. Due to the higher voltage requirements of this device, NiMh or NiCad batteries are not recommended.



www.lcmsystems.com

Due to continual product development, LCM Systems Ltd reserves the right to alter product specifications without prior notice.

CE Complies with EMC directive. 2004/108/EC

FC The Radio Equipment and Telecommunications Terminal Equipment (R&TTE) Directive, 1999/5/EC. Family: RAD24

Industry Canada Industrie Canada IC:7224A-RAD24

Issue No. 1

Issue date: 22/11/2016

APPROVED

(unapproved if printed)